

HS-XVR8101-L5

5-in-1 Hybrid digital Video Recorder



قابلیت های کلیدی

- یک عدد HDMI و یک عدد VGA
- پشتیبانی از 1 عدد هارد تا ظرفیت 8 ترابایت
- قابلیت بروزرسانی آنلاین


- پشتیبانی از سیگنال های تصویر TVI, AHD, CVI, CVBS, IP
- 8 کانال ورودی آنالوگ تا رزولوشن 5 مگاپیکسل
- 4 کانال IP تا رزولوشن 4 مگاپیکسل (تا 8 کانال فقط IP)
- پشتیبانی از دوربین های با پروتکل ONVIF

Specifications

Analog Video Input	8-ch, BNC
IP Video Input	4-ch(only IP up to 8ch), each channel up to 4MP
Analog Camera Types	Support AHD input: 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps Support TVI input: 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps Support CVI input: 1080P@30fps 720P@30fps Support CVBS input
Audio Input	1-ch, RCA
Audio Compression	6.711U
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x60/1200Hz, 1280x60/1024Hz, 1280x60/720Hz, 1024x60/768Hz
HDMI Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x60/1200Hz, 1280x60/1024Hz, 1280x60/720Hz, 1024x60/768Hz
Audio Output	1-ch, RCA
Synchronous Playback	HD:4-ch SD:8-ch
Live view display	HDMI/VGA: 16/9/8/6/4/1
Two-way Audio	1-ch, RCA

Incoming Bandwidth	32Mbps (Up to 40Mbps after all analog channel conversion)
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP
Recording Resolution	5MP Lite/4MP Lite /1080P Lite/720P/CIF
Recording Frame Rate	Main stream: 5MP Lite@6fps 4MP Lite@8fps 1080P Lite@12fps 720P@12fps Sub stream: D1@6fps D1@8fps D1@12fps D1@12fps
Audio Sample Rate	8KHz, 16 bit per channel
Audio Bit Rate	64Kbps per channel
Capability	Analog: 4 x 5MP Lite@6, 4x 4MP Lite@4, 8x 1080P Lite @12fps IP: 1 x 4MP@30, 2 x 1080P@30
SATA	1 SATA interface
Capacity	Up to 8TB for each HDD (The maximum HDD capacity varies with environment temperature)
General Alarm	Motion detection
Alert Alarm	IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
Power Supply	12V DC Power Consumption: ≤ 8 W (without HDD)
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)
Dimensions(W×D×H)	260mm × 226mm × 47mm (10.2" × 8.9" × 1.8")
Weight (without HDD)	≤ 1.1 Kg (2.42lb)

Dimensions

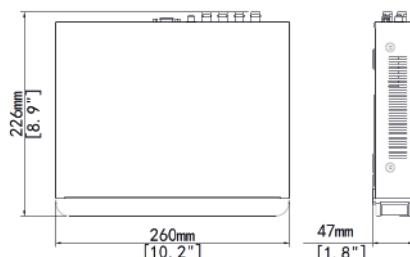

Rear Panel

